



# **Technical** Data Sheet

U-E20-Edge Shim thickness 2mm

# **COMPONENTS**

The U-E20-Edge is composed of 1 piece.

# **CHARACTERISTICS**


Weight: **0,042 kg** Lenght: **213 mm** Thickness: **2mm** 

# MATERIAL

Material: SBR Hardness Shore A Din 53505: 60-80 SHA Color: Black Density: 1,55 g/cm3 Temperature range: (-30) +/- 70 °C Tensile Strenght Din 53504: 3 Mpa Elongation at break DIN 53504: 250% Use of recycled materials exclusively of EU origin Resistant to weathering, sea salts, algae and a wide range of chemicals

# **PACKAGING**

Pieces per carton : **240 pcs** Carton weight : **10,6 kg** Carton dimension : **250x250x250mm** Cartons per pallet : **60 pcs** Pieces per pallet : **14 400 pcs** Pallet dimensions: **80 x 120 x 160 cm** 

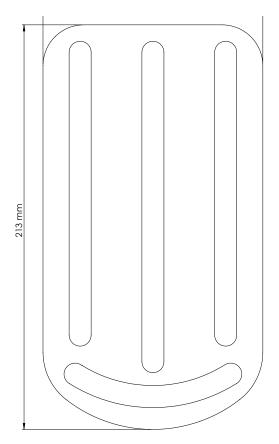



# **APPLICATIONS**

The U-E20 Edge is a 2 mm shim. Placed on the U-Edge support, it stabilises the paver, provides additional acoustic comfort, and compensates for variations in paver thickness.

# **SAFETY** INSTRUCTIONS

Buzon pedestals and accessories are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.





SINGAPORE GREEN BUILDING PRODUCT SGBC LEADER

043-055-1351 Made From Min. 50% Recycled Content