



PROBORD



DESCRIPTION

PROBORD is a stainless-steel corner profile for tiled walls, offering excellent protection for edges subject to heavy stresses. The surface of the profile forms a symmetrically rounded outside corner for the tiled surface. Its section and variety of heights and finishes make it a very sturdy profile suitable for every kind of environment.

MATERIAL

PROBORD is a polished and satin finish stainless steel AISI 304 / 1.4301 - V2A profile for tiled walls, offering excellent protection for edges subject to heavy stresses such as in industrial kitchens, slaughterhouses, sanitary facilities, and hospitals. The surface of the profile forms a symmetrically rounded outside corner for the tiled surface. It is available in heights of 8 / 10 and 12,5 mm with a visible surface of 25 x 25 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The two finishes and the three different heights make **PROBORD** an elegant and much sought-after profile.

AREAS OF USE

PROBORD in stainless steel AISI 304/ 1.4301 – V2A is suitable for any environment where high resistance to mechanical and chemical stresses are required. The profile is suitable for food contact



after cleaning and removing any surface residue.

WARNINGS

Do not use **PROBORD** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommended using a hacksaw with steel blade and treat the cutting surface with a stainless-steel passivation product.


MAINTENANCE

PROBORD does not require any special maintenance. It is suggested to clean them with normal household cleaning products.


LAYING INSTRUCTIONS

1. Choose “**PROBORD**” according to the flooring thickness and in the desired finish.
2. Cut “**PROBORD**” to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of “**PROBORD**” into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PEBDAC/ACS 08

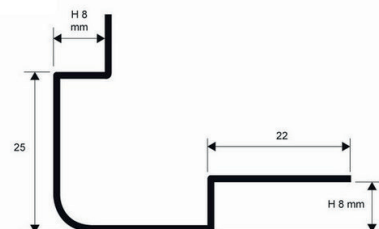

PEBDAC/ACS 10

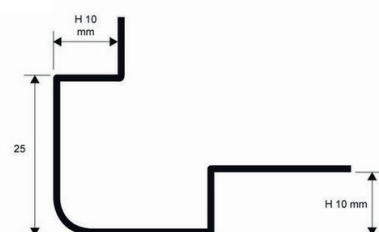

PEBDAC/ACS 125

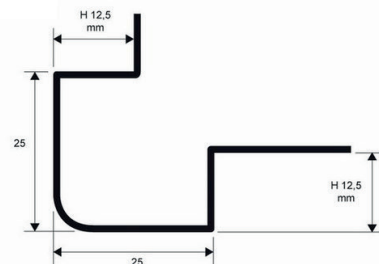

TEXT TEMPLATE FOR TENDERS

Delivery and installation of polished / satin finish stainless steel AISI 304 / 1.4301 - V2A profile for tiled walls, in height of 8 / 10 / 12,5 mm with a visible surface of 25 x 25 mm, offering excellent protection for edges subject to heavy stresses. The surface of the profile forms a symmetrically rounded outside corner for the tiled surface. It has a punched flange that guarantees a perfect grip to the adhesive like **PROBORD** of the Progress Profiles company.

PEBDAC/ACS 08 / 10 / 125: Polished and satin finish stainless steel.

Profile height : _____ mm
Profile length : _____ mt
Material : _____ €/mt
Application : _____ €/mt
Total : _____ €/mt