


EN Mitre Jolly Guide System with M14 Spindle



Using Video



Overview

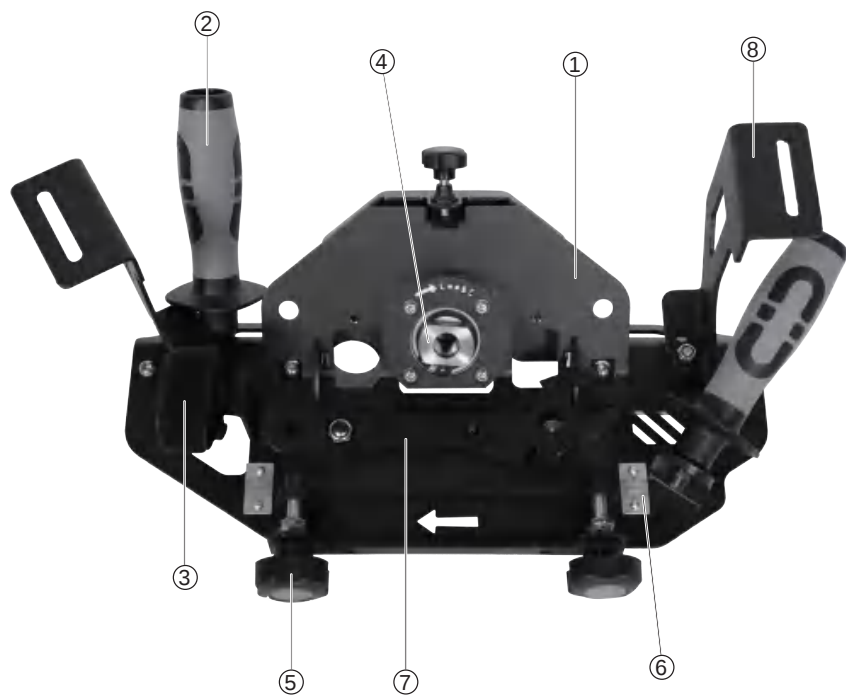

Scope of Delivery

A



B



C



D



E




F



G



Operation-Installation of angle grinder & cutting blade

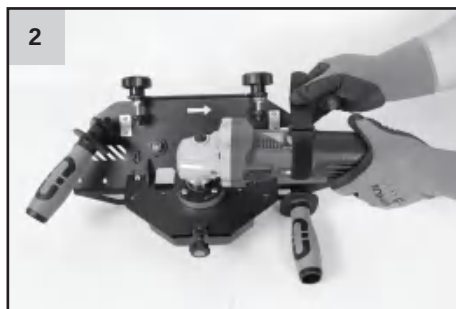

Operation-Leave the edge for fine adjustment



Operation-Bevel the back & bracket installation

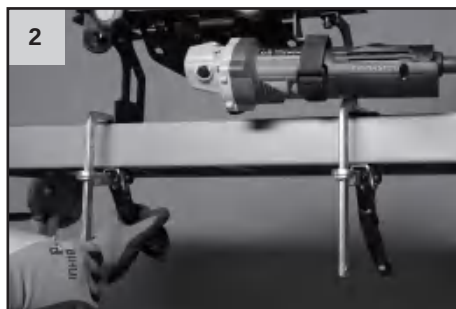


Table of Contents

Intended Use	7
Safety	7
Your Device at a Glance	9
Operation	9
Cleaning	10
Storage and Transport	10
Disposal	10
Technical Specifications	10

Intended Use

This device is intended for 48° chamfering cutting of tiles, slates and stones with ≤22mm thickness.

Any other use not described in these instructions constitutes unauthorized misuse.

The manufacturer is not liable for any resulting damage.

Safety



Read all safety instructions and warnings provided with power tool. Failure to follow the instructions below may result in electric shock, fire and / or serious injury.

Keep all warnings and instructions for future reference.

The term "power tool" used in the safety instructions refers to mains operated power tools (with power cord) or to battery operated tools (without power cord).

General safety warnings for power tools

Safety in work area

- **Keep your work area clean and well lit.** Disarray or unlit work areas can lead to accidents.
- **Do not work with the power tool in a potentially explosive environment in which flammable liquids, gases or dusts are present.** Power tools generate sparks that can ignite the dust or fumes.
- **Keep children and bystanders away while using the power tool.** Distractions can result in a loss of control.

Electrical Safety

- **The plug of the power tool must fit into the socket. The plug must not be changed in any way.** Do not use adapter plugs together with electrically grounded power tools. Unmodified plugs and matching sockets reduce the risk of electric shock.

- **Avoid body contact with grounded surfaces such as pipes, heaters, stoves, and refrigerators.** There is an increased risk of electric shock if your body is grounded.
- **Keep power tools away from rain or moisture.** The penetration of water into a power tool increases the risk of electric shock.
- **Do not misuse the power cord to carry the power tool, hang it up, or unplug it from the power outlet.** Keep the connection cable away from heat, oil, sharp edges or moving parts. Damaged or entangled leads increase the risk of electric shock.
- **When working outdoors with a power tool, only use extension cables that are also suitable for outdoor use.** Using an extension cord suitable for outdoor use reduces the risk of electric shock.
- **If operation of the power tool in a damp environment is unavoidable, use a residual current device.** Using a residual current circuit breaker reduces the risk of electric shock.

Personal Safety

- **Be attentive, pay attention to what you are doing and be reasonable about working with a power tool. Do not use a power tool when you are tired or under the influence of drugs, alcohol or medication.** A moment of carelessness when using the power tool can cause serious injury.
- **Wear personal protective equipment and always safety goggles.** Wearing personal protective equipment such as a dust mask, non-slip safety shoes, hard hat or ear protection, depending on the type and use of the power tool, reduces the risk of personal injury.
- **Avoid unintentional startup. Make sure that the power tool is switched off before connecting, receiving or carrying it to the power supply and / or the battery.** Keeping your finger on the switch when you are wearing the power tool or plugging the power tool into power can cause an accident.

- **Remove setting tools or wrenches before turning on the power tool.** A tool or key located in a rotating part of the power tool can cause injury.
- **Avoid an abnormal posture. Ensure a secure footing and maintain balance at all times.** This allows you to better control the power tool in unexpected situations.
- **Wear suitable clothing. Do not wear loose clothing or jewelry.** Keep hair and clothing away from moving parts. Loose clothing, jewelry or long hair can be caught by moving parts.
- **If dust extraction and collection equipment can be installed, they must be connected and used properly.** Using a dust extractor can reduce dust hazards.
- **Do not weigh yourself in false safety and do not overstep the safety rules for power tools, even if you are familiar with the power tool after many uses.** Careless action can lead to serious injuries within fractions of a second

Use and care of the power tool

- **Do not overload the power tool. Use the appropriate power tool for your work.** With the right power tool you work better and safer in the specified power range.
- **Do not use a power tool whose switch is defective.** A power tool that can not be turned on or off is dangerous and must be repaired.
- **Unplug the power cord and / or remove a detachable battery before making any adjustments to the device, changing the tool bits, or putting the power tool away.** This precaution prevents the unintentional start of the power tool.
- **Store unused power tools out of the reach of children. Do not allow persons to use the power tool that are unfamiliar or have not read these instructions.** Power tools are dangerous when used by inexperienced people.
- **Maintain power tools and insert tools with care. Check that moving parts are working properly and do not jam, that parts are broken or damaged enough to impair the functioning of the power tool. Have damaged parts repaired before using the power tool.** Many accidents are caused by badly maintained power tools.
- **Keep cutting tools sharp and clean.** Carefully maintained cutting tools with sharp cutting edges become less jammed and easier to guide.
- **Use power tools, accessories, tools etc. according to these instructions. Take into account the working conditions and the activity to be performed.** The use of power tools for other than intended applications can lead to dangerous situations.

- **Keep handles and grips dry, clean and free of oil and grease.** Slippery handles and gripping surfaces do not allow safe operation and control of the power tool in unforeseen situations.

Use and care of the battery tool

- **Charge the batteries only with chargers recommended by the manufacturer.** A charger suitable for a particular type of battery may cause a fire when used with other batteries.
- **Use only the appropriate batteries in the power tools.** Use of other batteries may cause injury or fire.
- **Keep the unused battery away from paper clips, coins, keys, nails, screws, or other small metal objects that could cause the contacts to bridge.** A short circuit between the battery contacts can cause burns or fire.
- **If used incorrectly, liquid may leak from the battery. Avoid contact with it. In case of accidental contact, rinse with water. If the fluid gets into your eyes, seek additional medical attention.** Leaking battery fluid may cause skin irritation or burns.
- **Do not use a damaged or modified battery.** Damaged or altered batteries can behave unpredictably and cause fire, explosion or injury.
- **Do not expose a battery to fire or high temperatures.** Fire or temperatures over 130 ° C can cause an explosion.
- **Follow all charging instructions and never charge the battery or the cordless tool outside the temperature range specified in the operating instructions.** Incorrect charging or charging outside the permitted temperature range can destroy the battery and increase the risk of fire.

Service

- **Only have your power tool repaired by qualified personnel and only with original spare parts.** This ensures that the safety of the power tool is maintained.
- **Never use damaged batteries.** All battery maintenance should only be done by the manufacturer or authorized service centers. Follow the instructions for lubricating and changing accessories.

Additional Safety Warning From The Manufacturer
Can only be used after correct installation.

- 1) Please use it with a vacuum cleaner suitable for concrete dust.
- 2) Wear protective equipment such as goggles, dust masks, protective suits and earplugs when working.
- 3) Make sure the angle grinder is clamped tightly before working.

DO NOT let comfort or familiarity with product (gained from repeated use) replace strict adherence to grinder safety rules. If you use this tool unsafely or incorrectly, you can suffer serious personal injury.

- **Always use proper guard with grinding wheel.** A guard protects operator from broken wheel fragments.
- **Accessories must be rated for at least the speed recommended on the tool warning label.** Wheels and other accessories running over rated speed can fly apart and cause injury.
- **Hold tool by Insulated gripping surfaces when performing and operation where the cutting tool may contact hidden wiring or its own cord.**
Contact with a "live" wire will make exposed metal parts of the tool "live" and shock the operator.
- **When using depressed center grinding wheels, be sure to use only fiberglass reinforced wheels.**
- **Always use safety glasses or goggles. Ordinary eye or sun glasses are NOT safety glasses.**
- **Check the wheel carefully for cracks or damaged before operation.** Replace cracked or damaged wheel immediately. Run the tool (with guard) at no load for about a minute, holding too away from others. If wheel is flawed, it will likely separate during this test.
- **Use only flanges specified for this tool.**
- **Be careful not to damage the spindle, the flange (especially the installing surface) or the out flange.**
Damage to these parts could result in wheel breakage.
- **NEVER use tool with wood cutting blades or other saw blades.** Such blades when used on a grinder frequently kick and cause loss of control leading to personal injury.
- **Hold the tool firmly.**
- **Keep hands away from rotating parts.**
- **Make sure cord is clean of wheel.** Do not wrap cord around your arm or wrist. If control of tool is lost, cord may become wrapped around you and cause personal injury.
- **Make sure the wheel is not contacting the workpiece before the switch is turned on.**
- **Before using the tool on an actual workpiece let it run for a while.** Watch for vibration or wobbling that could indicate poor installation or a poorly balanced wheel.
- **Use the specified surface of the wheel to perform the grinding.**
- **Watch out for flying sparks.** Hold the tool so that sparks fly away from you and other persons on flammable materials.

- **Do not leave the tool running.** Operate the tool only when hand-held.
- **Do not touch the workpiece immediately after operation; it may be extremely hot and could burn your skin.**
- **ALWAYS wear proper apparel including long sleeve shirts. Leather gloves and shop aprons to protect skin from contact with not grindings.**
- **Use of this tool to grind or sand some products Paints and wood could expose user to dust containing hazardous substances. Use appropriate respiratory protection.**

Your Device at a Glance



Note: The actual appearance of your device may differ from the illustrations.

→ Overview - p. 2

1. Protective Cover
2. Handle
3. Velcro Tape
4. Universal M14 Bearing
5. Adjustment Screw
6. Scale
7. Wrench
8. Bracket 

Scope of Delivery

→ Scope of delivery - p. 3

- A. Mitre Jolly Guide System
- B. Bracket x2
- C. Handle x2
- D. Box
- E. Wrench
- F. Vacuum cleaner connector
- G. 30cm Steel measure

Not Shown

User Manual

Operation



→ Operation - p. 4

Installation of angle grinder & cutting blade

→ p. 4, Fig. 1

Install the angle grinder onto the bracket(8)

→ p. 4, Fig. 2

Fix the angle grinder with the velcro tape(3)

→ **p. 4, Fig. 3**

Install the cutting blade

→ **p. 4, Fig. 4**

Restall the protective cover(1) and connect to the vacuum cleaner

→ **p. 4, Fig. 5**

Cut in the direction indicated by the arrow

Leave the edge for fine adjustment→ **p. 5, Fig. 1**

Loosen the nut with the wrench(7)

→ **p. 5, Fig. 2**

Place the ruler on the bearing(4) and adjust the screw(5)

→ **p. 5, Fig. 3**

Tighten the nut with the wrench(7)

Bevel the back & bracket installation→ **p. 6, Fig. 1**

Remove the handle(2), and install the bracket(8)

→ **p. 6, Fig. 2**

Fix the bracket(8) to the operation table with clips

→ **p. 6, Fig. 3**

Adjust the height of the protective cover(1) according to the thickness of the tile

→ **p. 6, Fig. 4**

Press the edge of the tile tightly against the bearing(4) and push the tile from right to left to cut

Cleaning

Always be sure that the tool is switch off and unplugging before attempting to perform inspection and maintenance.

-The tool and its air vents have to be keep clean, regularly clean the tool's air vents or whenever the vents start to become obstructed.

-Check the all screws if be loosened or no periodically.

-Usually check the cord insulation if broken or not.

-Do not wash with water. Wipe with a dry cloth after cutting.

Storage and Transport

-Store the device in a dry, dust-free location.

-Please replace the bottom slider in time when worn out.

Disposal

- Do not dispose of electrical appliances in the household waste.

- Follow the local provisions for the disposal of electrical or battery products.

- Valuable materials can be recovered by recycling.

- The electrical or battery components used for construction are in accordance with the regulation European Directive 2012/19 / EU on waste electrical and electronic equipment and transposition into national law., used electrical appliances must be collected separately and recycled in an environmentally sound manner.

- Contact us for further information.

**Technical Specifications**

Item number	LFMBU
Compatible with	M14 angle grinder
Bevel Angle	48°
Cutting Blade	125mm
Max Cutting Thickness	22mm
Adjustable Range	1-5mm
Weight	3.5kg
Product Size	43x22x17cm



Note: Appearance and technical data may differ due to product improvements.



No.528, Tongxin Road, Tongxiang City, Zhejiang
www.bihuitools.com • sales@bihuitools.com • Made in P.R.C